

ORLANDOLED

Product description

Boasting all the benefits of tough construction and easy installation, the stands out as the perfect LED solution for berth light applications, ensuring longevity and substantial energy/fuel savings. Manufactured to withstand the harshest marine conditions, a robust steel body guarantees exceptional vibration resistance. The inclusion of two rear mounting holes facilitates a hassle-free installation process, ultimately reducing maintenance efforts and making your life easier.

- Exceptionally vibration resistant
- Low maintenance
- Easy to install



Designed and Manufactured
in Europe



Specification


ORLANDOLED Berth Light		
Wattage	7W	11W
Voltage	220-240v; 50/60Hz	
Light Colour	3,000K	3,000K
Luminous Flux	960 lm	1,250 lm
Dimensions (see diagrams overleaf)	(L1)	495mm
	(L2)	See diagrams overleaf
	(L3)	170mm
Weight	2.5kg	2.0kg
IP Rating	IP30	IP44
Fixing	2 rear mounting holes	
Construction	Zinc coated steel	
Finish	Powder coated white	
Recommended Location	Indoor	
Warranty	5 Years	
Product code	ORL0630	ORL1130

Add Suffix

'S' for version with shaver socket

Technical Drawing

6W

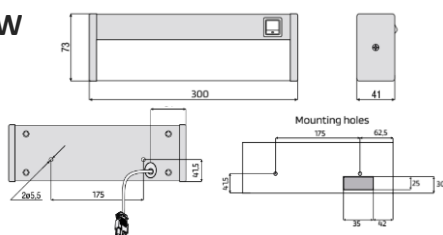

11W

